

IDEAL-PAK

Filling & Packaging Line Solutions


Industry Solutions Since 1949

PREMIER

Automatic Filling Machine
E-Series

Line

DFS™ Module

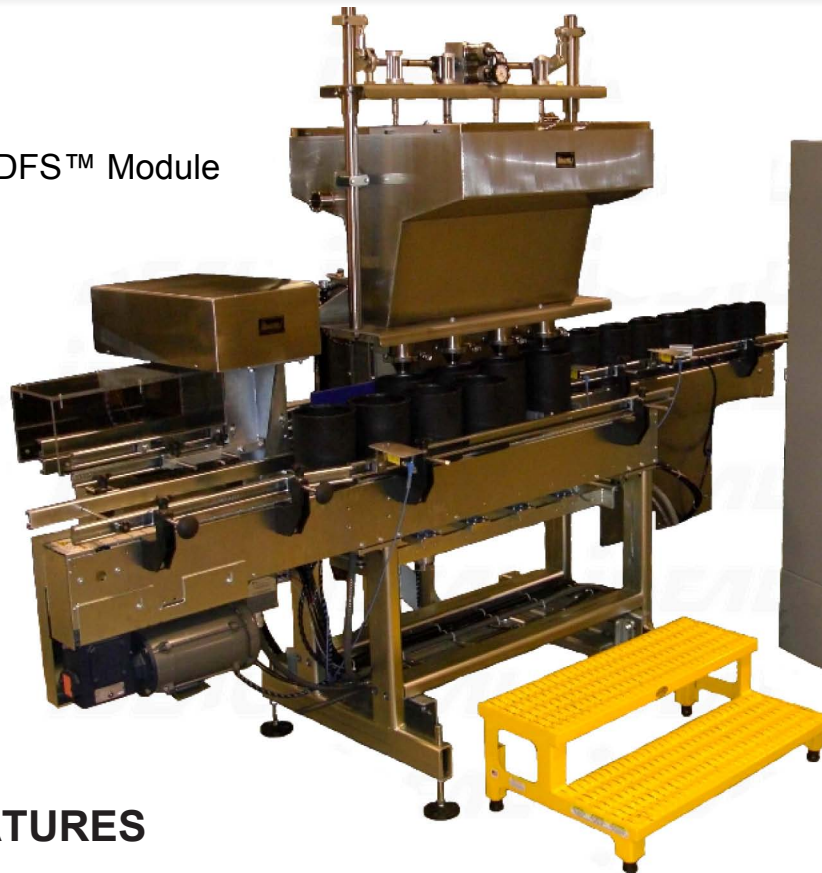

Optional Safety Steps

FEATURES

- Patented Flush-Fill system with DFS™ Modules
- Net Weight Filling with Precision Load Cells
- Container Transfer with Independent Pushers
- Recipe Storage with Expandable Memory
- SPC with Checkweigh Data Logging
- Touchscreen HMI with Ethernet Connectivity

Model: AE4-LNM



IDEAL[®]
MANUFACTURING & SALES CORP.

Ideal Manufacturing & Sales Corp.
4607 Dovetail Drive • Madison, WI 53704
Toll Free: (800) 383-1128 • Local: (608) 241-1118
www.ideal-pak.com

May be covered by one or more of the following
U.S. Patents: #5,505,233, #5,823,406, #6,148,877, #6,595,250



Sizes

	1/2 Pint	Pails
	Pints	Kegs
●	Quart	Drums
●	Gallons	Totes

Machine Specifications			
Electrical	230/460 VAC, 3Ø, 60Hz		
Air	9 SCFM @ 80 PSI (clean dry air) (does not include product supply pump)		
Speed *	Heads	4	6
	Quart	20-30	30-45
	Gallon	20-30	30-45
Accuracy	To within ± .02 lb.		
*Fill rates will vary depending on container size, container shape, fill opening, accuracy required, product supply, as well as individual product characteristics and operation mode.			

Since we continuously strive to improve our products, we reserve the right to make changes and modifications without notice.

Direct Fill System™



OPTIONS

- Lid Placer
- Heavy Duty Roller Closer
- Flush Trough
- Remote Flush Controls
- Fills Other Sizes
- Container Types Filled
- Explosion Proof Package
- Vapor Management
- Interlocked Guards
- Nitrogen Container Purge
- Expandable Configurations
- Rotary Tables
- Customized Conveyor Lengths
- Multiple Interchangeable Filling Modules

Maximize your investment with the DFS™

- Patented flush-fill system allows more machine run time
- A balance flow offers faster fill rates
- Fewer wetted parts provide greater batch yields
- Gravity head pressure eliminates splattering

